



Lifepo4 48V Rack Mount Lithium Battery 100Ah 200Ah 5Kwh 10Kwh

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-10240W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



Product Specification

- Nominal Voltage: 51.2 Volts
- Nominal Capacity: 50 - 200 Amper Hour
- Nominal Energy: 2560 - 10240 Wh
- Cell Type: LiFePO4 Prismatic Cell
- Discharge Current: 50A
- Max Charge Current: 50A
- Discharge Cut-off Voltage: 42.5V
- Display: LCD Optional
- Communication Interface: RS485, RS232, CAN
- Cycle Life: >6000 Cycles(80%DOD)
- Highlight: **Lifepo4 48V Rack Mount Lithium Battery, 48V Rack Mount Lithium Battery 100Ah, 5Kwh rack mount lifepo4 battery**

for more products please visit us on esslithiumbattery.com

Product Description

Rackmount Lithium Ion Battery 51.2v 48 Volt 100Ah 200Ah 5Kwh 10Kwh Lifepo4 Lithium Batteries

Features of Rackmount Lithium Battery

1. Smart BMS, Intelligent Management of Batteries Precise Control
2. Support max. 12 parallels
3. Safe and Eco-friendly, The safest LiFePO4 Battery
4. With RS485/CAN Communication Port
5. Easy Installation, Easy Plug-in
6. Certification, CE(EMC)/UN38.3/MSDS/ROHS

More Reliable

1. Advanced LiFePO4 technology
2. Smart battery management system
3. High quality facility with TS16949


More Flexible

1. Modular structure,easier expansion
2. Easy transportation,fast installation

Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO4		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm


Operation Pannel of Rackmount Lithium Battery

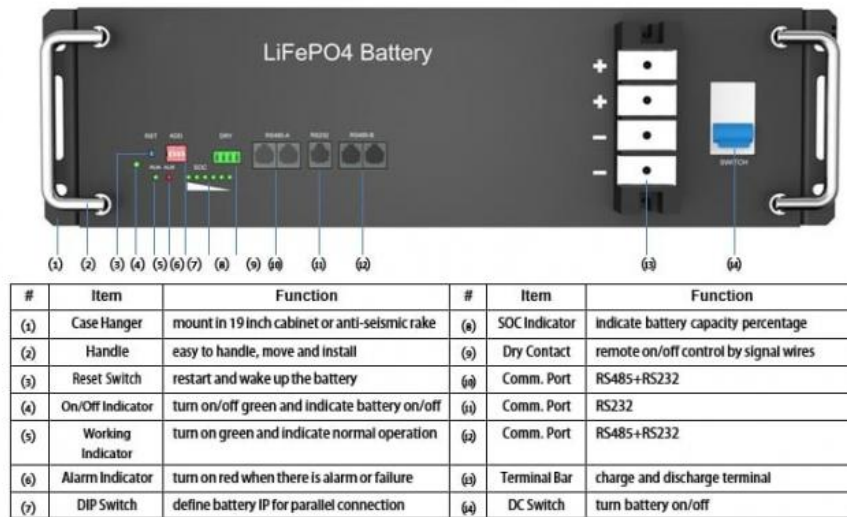

Size of Rackmount Lithium Battery

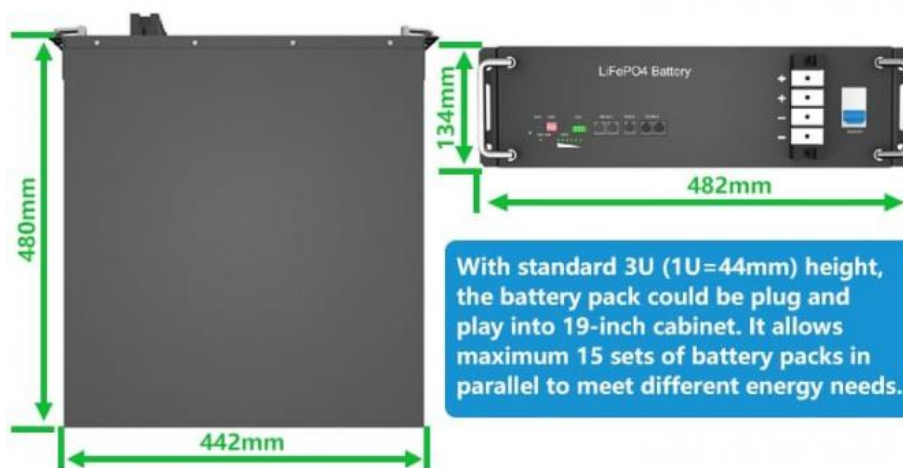

Structure of Rackmount Lithium Battery

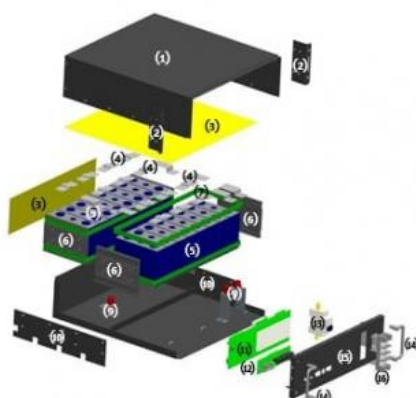

#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	/
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	/

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Why choose us?

We production of battery products are widely used in communications, power, financial systems, uninterruptible power supply systems (UPS), power plant and substation switch control, solar panels, controllers inverter etc solar systems, emergency lighting, alarm systems, cars, ships, motorcycles, electric bicycles and other industries. Sales network covers all provinces, municipalities, autonomous regions and established offices in various places and after-sales service center.

Our team with Yuasa ,BYD battery senior consultant,High quality technical management team, advanced production and testing equipment to ensure the quality of the battery is reliable.



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China